




MASTER NYLON HEADED FASTENERS™

FLEXIBLE & RIGID COLORED HEADS ARE AVAILABLE FOR A SERIES OF MASTER DRILLERS - MASTER TAPPERS & MASTER GRIPPERS

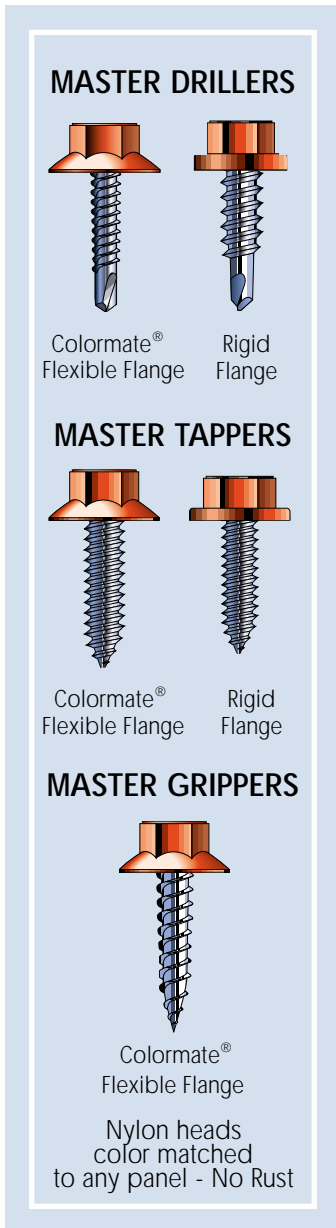



- Nylon headed fasteners are manufactured with two types of head - Colormate® Flexible Flange & Rigid Flange.
- Rigid Flange heads are molded from tough thermoplastic nylon resin, reinforced with fiberglass.
- Flexible Flange heads are molded from pure nylon.
- Flexible Flange heads fasten side wall panels.
- Rigid Flange heads with accessory washer fastens roof panels.
- The heads are permanently joined to a hardened steel shank by injection molding for an excellent connection and high pull-over values.
- Durable, decorative and economical, nylon headed fasteners will match or surpass the service life of your panels.

COLORMATE® FLEXIBLE FLANGE FASTENERS

- #10 Master Grippers with 3/8" hex heads available in 1", 1-1/2" & 2", 2-1/2".
- #14 Master Grippers with 7/16" hex heads available in 1-1/4".
- #14 Master Tappers with 7/16" hex heads available in 3/4", 1-1/2", 2", 3" AB.
- #14 - 304 Stainless Steel Master Tappers with 7/16" hex heads available in 3/4", 1-1/2" AB & 3/4" B.
- #14 Master Drillers with 7/16" hex heads available in 1" SD3 & 1-3/8" SD3.

RIGID FLANGE FASTENERS

- #14 Master Tappers with 7/16" hex heads available in 3/4" & 1-1/2" AB.
- #12 Master Drillers with 7/16" hex heads available in 3/4", 1-1/4", 1-1/2", 2" & 3" SD3.
- #12 Master Drillers are available with pilot points to prevent jacking when drilling multiple sheets.
- #1/4 Master Drillers with 7/16" hex heads are available in 1", 1-1/4" & 2"SD3 AND 7/8" Stitch LAP point.
- #12 & #14 Master Drillers are also available in 410 stainless steel.

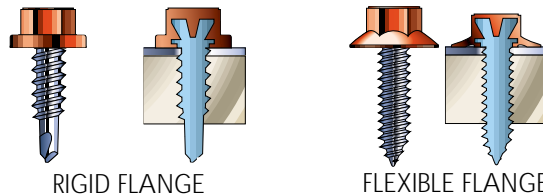

4 lobes prevent Nylon Head from turning on the shank

Anti-corrosion finishes available for Master Nylon Headed Fasteners

Standard Coating

**JS500
PLATING
SYSTEM**

Withstands 500 Hours Salt Spray test and 5 cycles in Kesternich (1 litre SO2 per cycle) testing
No Red Rust

304 & 410 HT Stainless

**JS600
PLATING
SYSTEM**

High lubricity anti-corrosion protection for stainless steel
No Red Rust

SD3 refer to Self Drilling point sizes. Please refer to page 16.

For detailed information on finishes see plating & coating section